


# Series 1600


.0787" - .3750"  
(2.000mm - 9.525mm)



TOLERANCES		
<i>d</i>	+.0000" - .0005" (+.0000 - .0127mm)	
<i>l1</i>	≤ 1/8"	+.125" - .062" (+3.175 - 1.588mm)
	> 1/8"	+.125" - .125" (+3.175 - 3.175mm)
<i>l2</i>	≤ 1/8"	+.125" - .062" (+3.175 - 1.588mm)
	> 1/8"	+.125" - .125" (+3.175 - 3.175mm)

## N/C Spotting


- Solid submicron grain carbide drill
- For spotting to stabilize long drills
- Can be used for chamfering
- Rough, angled or spherical surfaces
- No O.D. clearance
- For locating on true position
- Live tooling recommended on lathe processes

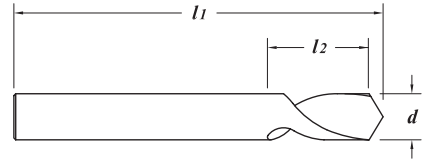

82° EDP#	90° EDP#	120° EDP#	142° EDP#	<i>d</i> † Diameter		<i>l1</i> Overall Length	<i>l2</i> Flute Length	LIST PRICE	
				Decimal	Metric				
91650	91500	91572	91240	.0787	2.000	50	10	9.76	
91652	91505	91575	91245	.0938	3/32"	2"	3/8"	11.05	
-	91507	-	-	.1181	3.000	38	6	12.20	
-	91510	91580	91250	.1181	3.000	50	10	13.03	
-	91512	-	-	.1181	3.000	75	10	15.11	
-	91514	-	-	.1250	1/8"	3.175	1-1/2"	12.20	
91656	91000	91100	91260	.1250	1/8"	3.175	2"	3/8"	13.03
-	91002	-	-	.1250	1/8"	3.175	3"	3/8"	15.11
91658	91520	91590	91270	.1575	4.000	50	12	15.04	
-	91522	-	-	.1875	3/16"	4.763	2"	3/8"	15.04
-	91524	-	-	.1875	3/16"	4.763	2-1/2"	1/2"	15.58
91660	91010	91110	91280	.1875	3/16"	4.763	3"	3/4"	17.04
-	91012	-	-	.1875	3/16"	4.763	4"	3/4"	19.93
-	91014	-	-	.1969	5.000	50	10	16.36	
-	91530	91600	91290	.1969	5.000	65	15	17.90	
-	91532	-	-	.1969	5.000	75	15	19.28	
-	91534	-	-	.2362	6.000	50	12	18.39	
91664	91540	91610	91300	.2362	6.000	65	20	18.81	
-	91542	-	-	.2362	6.000	75	20	20.22	
-	91544	-	-	.2362	6.000	100	20	23.61	
-	91546	-	-	.2500	1/4"	6.350	2"	1/2"	18.39
-	91547	-	-	.2500	1/4"	6.350	2-1/2"	5/8"	18.81
91666	91020	91120	91310	.2500	1/4"	6.350	3"	3/4"	20.22
-	91021	-	-	.2500	1/4"	6.350	4"	3/4"	23.61
-	91022	-	-	.2500	1/4"	6.350	6"	3/4"	34.93
-	91023	-	-	.3125	5/16"	7.938	2"	1/2"	22.28
-	91024	-	-	.3125	5/16"	7.938	2-1/2"	5/8"	22.82
91668	91025	91125	91315	.3125	5/16"	7.938	3"	1"	24.46
-	91026	-	-	.3125	5/16"	7.938	4"	1"	29.12
-	91548	-	-	.3150	8.000	50	12	22.28	
-	91549	-	-	.3150	8.000	65	16	22.82	
91670	91550	91620	91320	.3150	8.000	75	25	24.46	
-	91551	-	-	.3150	8.000	100	25	29.12	
-	91028	-	-	.3750	3/8"	9.525	2"	1/2"	23.84
-	91029	-	-	.3750	3/8"	9.525	2-1/2"	5/8"	24.71
91672	91030	91130	91330	.3750	3/8"	9.525	3"	1"	26.53
-	91031	-	-	.3750	3/8"	9.525	4"	1"	32.48
-	91032	-	-	.3750	3/8"	9.525	6"	1"	47.26

82° EDP#	90° EDP#	120° EDP#	142° EDP#	$d^+$ Diameter		$l_1$ Overall Length	$l_2$ Flute Length	LIST PRICE
				Decimal	Metric			
-	91558	-	-	.3937	10.000	65	16	31.58
-	91559	-	-	.3937	10.000	70	20	32.42
-	91560	91630	91340	.3937	10.000	88	25	36.60
-	91561	-	-	.3937	10.000	100	25	39.76
-	91564	-	-	.4375	7/16"	11.113	2-3/4"	35.03
91676	91565	91635	91345	.4375	7/16"	11.113	4"	40.86
-	91568	-	-	.4724	12.000	65	16	37.32
-	91569	-	-	.4724	12.000	75	20	37.99
-	91570	91640	91350	.4724	12.000	100	30	43.99
-	91038	-	-	.5000	1/2"	12.700	2-1/2"	38.51
-	91039	-	-	.5000	1/2"	12.700	3"	39.08
91680	91040	91140	91360	.5000	1/2"	12.700	4"	45.75
-	91041	-	-	.5000	1/2"	12.700	6"	69.14
-	91050	91170	91370	.5512	14.000	100	30	78.84
91684	91060	91180	-	.5625	9/16"	14.287	4"	85.97
-	91067	-	-	.6250	5/8"	15.875	3"	82.15
-	91068	-	-	.6250	5/8"	15.875	3-1/2"	82.72
-	91069	-	-	.6250	5/8"	15.875	4"	91.13
91686	91070	91190	91390	.6250	5/8"	15.875	5"	105.48
-	91077	-	-	.6299	16.000	75	20	84.81
-	91078	-	-	.6299	16.000	88	25	85.43
-	91079	-	-	.6299	16.000	100	25	93.12
91688	91080	91200	91400	.6299	16.000	125	30	108.30
91690	91090	91210	-	.7087	18.000	125	30	148.57
-	91148	-	-	.7500	3/4"	19.050	3"	124.57
-	91149	-	-	.7500	3/4"	19.050	4"	128.96
91692	91150	91220	91420	.7500	3/4"	19.050	5"	152.60
-	91159	-	-	.7874	20.000	100	25	144.09
-	91160	91230	91430	.7874	20.000	125	30	165.22
-	91161	-	-	.7874	20.000	150	30	182.44

DIAMETER	DRILL POINT ANGLE				
	82°	90°	120°	142°	
2mm	.0787	.003	.002	.001	.001
3/32"	.0938	.003	.003	.002	.001
3mm	.1181	.004	.004	.002	.001
1/8"	.1250	.004	.004	.002	.001
4mm	.1575	.005	.005	.003	.002
3/16"	.1875	.006	.006	.003	.002
5mm	.1969	.007	.006	.003	.002
6mm	.2362	.008	.007	.004	.003
1/4"	.2500	.009	.008	.004	.003
5/16"	.3125	.011	.009	.005	.003
8mm	.3150	.011	.009	.005	.003
3/8"	.3750	.013	.011	.006	.004
10mm	.3937	.014	.012	.007	.004
7/16"	.4375	.015	.013	.008	.005
12mm	.4724	.016	.014	.008	.005
1/2"	.5000	.017	.015	.009	.005
14mm	.5512	.019	.017	.010	.006
9/16"	.5625	.019	.017	.010	.006
5/8"	.6250	.022	.019	.011	.007
16mm	.6299	.022	.019	.011	.007
18mm	.7087	.024	.021	.012	.008
3/4"	.7500	.026	.023	.013	.008
20mm	.7874	.027	.024	.014	.009

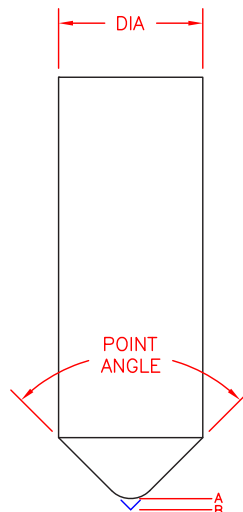

Garr Tool series 1600 spotting drills are not only useful for starting holes, but also for leaving the desired chamfer when programmed to the correct depth. Because spotting drills do not come to a true point, but have a small "flat" as shown in the figure to the left, the length deviation from the chart must be taken into account to leave the correct chamfer length. This chart gives the distance from the theoretical drill point 'B' to the actual drill point 'A'. These values can be used to compensate for the "flat" on our spotting drills in your calculations.