



TOLERANCES

$d1$	+0.000" - .002" (+.000 - .050mm)
$d2$	h6



Stub Length - Double End

Solid submicron grain carbide end mill - center cutting
 Shorter flute length for rigidity
 Extremely versatile
 TiAlN Coating - page 199
 Standard Length - page 226

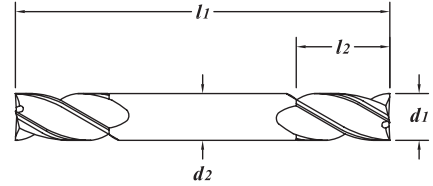

EDP#	$d1$ † Diameter		$d2$ Shank Diameter	$l1$ Overall Length	$l2$ Flute Length	1-11	12-24	25-49	50-100	
	Decimal	Metric								
06020	.0469	3/64"	1.191	1/8"	1-1/2"	3/32"	19.34	18.50	17.66	16.82
06030	.0625	1/16"	1.588	1/8"	1-1/2"	1/8"	19.34	18.50	17.66	16.82
06040	.0938	3/32"	2.383	1/8"	1-1/2"	3/16"	19.34	18.50	17.66	16.82
06540	.0984		2.500	3.0	38	5	20.36	19.47	18.59	17.70
06050	.1250	1/8"	3.175	1/8"	1-1/2"	1/4"	11.98	11.46	10.94	10.42
06560	.1378		3.500	4.0	50	7	22.43	21.45	20.48	19.50
06060	.1562	5/32"	3.967	3/16"	2"	5/16"	21.29	20.36	19.44	18.51
06570	.1575		4.000	4.0	50	8	18.30	17.50	16.71	15.91
06070	.1875	3/16"	4.763	3/16"	2"	3/8"	17.38	16.62	15.87	15.11
06080	.2188	7/32"	5.558	1/4"	2-1/2"	1/2"	24.83	23.75	22.67	21.59
06600	.2362		6.000	6.0	65	12	23.81	22.77	21.74	20.70
06090	.2500	1/4"	6.350	1/4"	2-1/2"	1/2"	22.61	21.63	20.64	19.66
06100	.3125	5/16"	7.938	5/16"	2-1/2"	1/2"	28.14	26.92	25.69	24.47
06110	.3750	3/8"	9.525	3/8"	2-1/2"	1/2"	29.92	28.62	27.32	26.02
06130	.5000	1/2"	12.700	1/2"	3"	5/8"	50.85	48.64	46.43	44.22