Series 435M, 435MA

TOLERANCES	
d_1	+.000" –.002" (+.000 –.050mm)
d_2	-.0001" -.0005" (-.0025 - .0127mm)



Standard Length - Double End - 3/8" Shank

Solid submicron grain carbide end mill - center cutting
Common 3/8" diameter shank with weldon flat
For strength and adaptability when converting from high speed steel

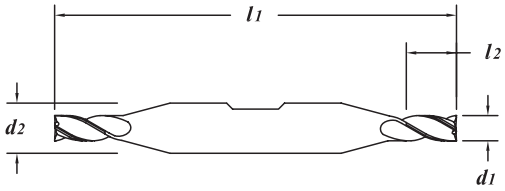

(435M) EDP#	d_1 † Diameter Decimal	Diameter	Metric	d_2 Shank Diameter	l_1 Overall Length	l_2 Flute Length	LIST PRICE
34010	.1250	1/8"	3.175	3/8"	3"	3/8"	37.40
34020	.1562	5/32"	3.967	3/8"	3"	7/16"	37.40
34030	.1875	3/16"	4.763	3/8"	3"	1/2"	37.40
34050	.2500	1/4"	6.350	3/8"	3"	5/8"	37.40
34060	.2812	9/32"	7.142	3/8"	4"	11/16"	42.98
34070	.3125	5/16"	7.938	3/8"	4"	3/4"	42.98
34090	.3750	3/8"	9.525	3/8"	4"	3/4"	42.98



Standard Length - Double End - 3/8" Shank

TiALN Coated

Solid submicron grain carbide end mill - center cutting
Common 3/8" diameter shank with weldon flat
For strength and adaptability when converting from high speed steel
Dry or semi-dry machining

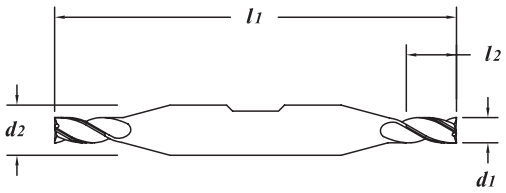

(435MA) EDP#	d_1 † Diameter Decimal	Diameter	Metric	d_2 Shank Diameter	l_1 Overall Length	l_2 Flute Length	LIST PRICE
34017	.1250	1/8"	3.175	3/8"	3"	3/8"	49.22
34027	.1562	5/32"	3.967	3/8"	3"	7/16"	49.22
34037	.1875	3/16"	4.763	3/8"	3"	1/2"	49.22
34047	.2188	7/32"	5.558	3/8"	3"	9/16"	49.22
34057	.2500	1/4"	6.350	3/8"	3"	5/8"	49.22
34067	.2812	9/32"	7.142	3/8"	4"	11/16"	57.98
34077	.3125	5/16"	7.938	3/8"	4"	3/4"	57.98
34097	.3750	3/8"	9.525	3/8"	4"	3/4"	57.98

† *Metric equivalents are for reference only*