

Straight - RHC
 RHS - RHC
 LHS - RHC

REAMERS


Special Reamers - Solid Carbide - 2 Week Delivery

Solid Carbide Submicron Grain

All reamers furnished with a standard 45° Lead Chamfer

Shank diameter is .003"-.005" smaller than fluted diameter except where indicated by (*)

(*) - No plunge on shank

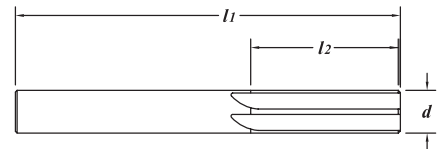

	d_1 † Diameter		l_1 Overall Length	l_2 Flute Length	No. of Flutes
	Decimal	Metric			
*	.0625" - .0850"	1.59 - 2.16	1-3/4"	1/2"	4
	.0851" - .1000"	2.16 - 2.54	2"	5/8"	4
	.1001" - .1150"	2.54 - 2.92	2-1/4"	5/8"	4
	.1151" - .1300"	2.92 - 3.30	2-1/4"	5/8"	4
	.1301" - .1450"	3.30 - 3.68	2-1/2"	3/4"	4
	.1451" - .1600"	3.68 - 4.06	2-1/2"	3/4"	4
	.1601" - .1750"	4.06 - 4.45	2-3/4"	7/8"	4
	.1751" - .1950"	4.45 - 4.95	2-3/4"	7/8"	4
	.1951" - .2250"	4.95 - 5.72	3"	1"	4
	.2251" - .2550"	5.72 - 6.48	3"	1"	4
	.2551" - .2850"	6.48 - 7.24	3-1/4"	1-1/8"	6
	.2851" - .3200"	7.24 - 8.13	3-1/4"	1-1/8"	6
	.3201" - .3500"	8.13 - 8.89	3-1/2"	1-1/4"	6
	.3501" - .3850"	8.89 - 9.78	3-1/2"	1-1/4"	6
	.3851" - .4450"	9.78 - 11.30	4"	1-1/2"	6
	.4451" - .5000"	11.30 - 12.70	4"	1-1/2"	6