

S M P K

High Performance End Mills

X9 BALIQ® ALCRONOS Coating (AlCrN)

G9 BALIQ® TISINOS PRO Coating (AlTiSiN)

X9 Target Materials:

Stainless Steel (Inox, Austenitic/Martensitic)

Carbon Tools Steels (Up to 50 HRC)


Cast Iron

G9 Target Materials:


Heat Resistant Super Alloys

PH Stainless Steels (Inox, 13-8, 15-5, 17-4, Martensitic)

Conditioned Tool Steels (50-70 HRC)



CALCULATE IDEAL PARAMETERS
FOR THE X9 AND G9 IN YOUR
APPLICATION WITH THE GARR
TECHNICAL ADVISOR

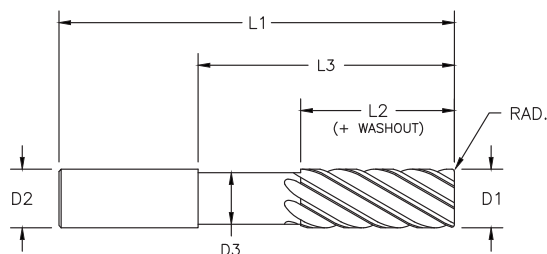

X9

G9

G9

X9

MATERIAL HARDNESS (Rc)

0

35

70



← View the X9

View the G9 →



TOLERANCES

$d1$	$+0.000" - .002" (+.000mm - .050mm)$
$d2$	$h6$
r	$+0.001" - .001" (+.025 - .025mm)$

HIGH EFFICIENCY MILLING

Series X9, G9



.5000" - .7500"
(12.700mm - 19.050mm)

X9 Recommended for Low, Medium, and High Carbon Tool Steels (up to 50 HRC), cast iron, and stainless steel (Inox).

G9 Recommended for tough machining materials such as Heat Resistant Super Alloys,
PH Stainless steels (Inox), and conditioned tool steels. (50-70 HRC)

9 Flute High Performance End Mills

X9 BALIQ® ALCRONOS Coating (AlCrN-based)

G9 BALIQ® TISINOS PRO Coating (AlTiSiN)

Solid submicron grain carbide - center cutting

h6 shank tolerance


Engineered for High Efficiency Milling

Variable flute grind

Honed edge treatment

Polished fluting

Material and condition specific coatings

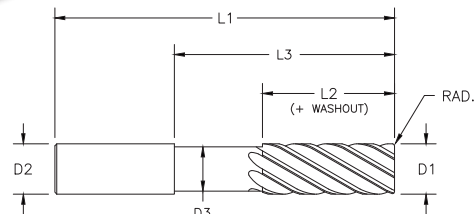

X9 EDP#	G9 EDP#	$d1$ † Diameter			$d2$ Shank Diameter	$l1$ Overall Length	$l2$ Flute Length	r Corner Radius	$d3$ Neck Diameter	$l3$ Reach Length	LIST PRICE
		Decimal		Metric							
31100	31101	.5000	1/2"	12.700	1/2"	3"	1-1/4"	.015"	-	-	92.19
31102	31103	.5000	1/2"	12.700	1/2"	3"	1-1/4"	.030"	-	-	92.19
31104	31105	.6250	5/8"	15.875	5/8"	3"	3/4"	.030"	-	-	136.15
31106	31107	.6250	5/8"	15.875	5/8"	3-1/2"	3/4"	.060"	-	-	136.15
31108	31109	.6250	5/8"	15.875	5/8"	3-1/2"	3/4"	.090"	-	-	136.15
31110	31111	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/4"	.015"	-	-	140.89
31112	31113	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/4"	.030"	-	-	140.89
31114	31115	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/4"	.060"	-	-	140.89
31116	31117	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/4"	.090"	-	-	140.89
31118	31119	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/2"	.020"	-	-	140.89
31122	31121	.6250	5/8"	15.875	5/8"	3-1/2"	1-5/8"	.020"	-	-	140.89
31124	31123	.6250	5/8"	15.875	5/8"	4"	1-7/8"	.030"	-	-	148.53
31126	31125	.6250	5/8"	15.875	5/8"	5"	1-1/4"	.015"	.595"	2-1/2"	201.79
31128	31129	.6250	5/8"	15.875	5/8"	5"	1-1/4"	.030"	.595"	2-1/2"	201.79
31130	31131	.6250	5/8"	15.875	5/8"	5"	1-1/4"	.015"	.595"	3-1/8"	201.79
31132	31133	.6250	5/8"	15.875	5/8"	5"	1-1/4"	.030"	.595"	3-1/8"	201.79
31134	31135	.6299		16.000	16	100	42	1.00	-	-	157.80
31136	31137	.6299		16.000	16	120	65	0.50	-	-	198.41
31138	31139	.6299		16.000	16	120	40	0.50	15.2	65	202.30
31140	31141	.7500	3/4"	19.050	3/4"	3"	1"	.030"	-	-	184.90
31142	31143	.7500	3/4"	19.050	3/4"	3"	1"	.060"	-	-	184.90
31144	31145	.7500	3/4"	19.050	3/4"	3"	1"	.120"	-	-	184.90
31146	31147	.7500	3/4"	19.050	3/4"	4"	1-1/2"	.015"	-	-	194.04
31148	31149	.7500	3/4"	19.050	3/4"	4"	1-1/2"	.030"	-	-	194.04
31152	31151	.7500	3/4"	19.050	3/4"	4"	1-1/2"	.060"	-	-	194.04
31154	31153	.7500	3/4"	19.050	3/4"	4"	1-1/2"	.120"	-	-	194.04
31156	31155	.7500	3/4"	19.050	3/4"	5"	2-1/4"	.030"	-	-	262.80
31158	31159	.7500	3/4"	19.050	3/4"	6"	1-1/2"	.015"	.720"	3"	319.35
31162	31161	.7500	3/4"	19.050	3/4"	6"	1-1/2"	.030"	.720"	3"	319.35
31164	31163	.7500	3/4"	19.050	3/4"	6"	1-1/2"	.015"	.720"	3-3/4"	319.35
31166	31165	.7500	3/4"	19.050	3/4"	6"	1-1/2"	.030"	.720"	3-3/4"	319.35

HIGH PERFORMANCE
END MILLS

G9

X9

35

MATERIAL HARDNESS (RC)

0

800-248-9003

989-463-6171

fax 989-463-3609