




Solid Carbide Grinding Burrs

Submicron Grain Carbide
 Standard 45° lead chamfer
 Head diameter tolerance +.002" -.002" (+.051mm -.051mm)
 * - Carbide shank brazed to carbide head

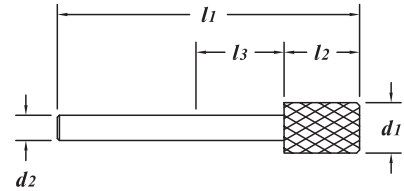

EDP#	d_1 † Diameter		d_2 Shank Diameter	l_1 Overall Length	l_2 Flute Length	l_3 Neck Length	1-11	12-24	25-49	50-100	
	Decimal	Metric									
76010	.0480	1.22	1/8"	1-1/2"	1/8"	1/2"	13.57	12.98	12.40	11.80	
75010	.0625	1/16"	1.59	1/8"	1-1/2"	1/8"	3/8"	13.57	12.98	12.40	11.80
76020	.0790	2.01	1/8"	1-1/2"	1/8"	1/2"	13.57	12.98	12.40	11.80	
75020	.0938	3/32"	2.38	1/8"	1-1/2"	5/32"	3/8"	13.57	12.98	12.40	11.80
76030	.1100	2.79	1/8"	1-1/2"	5/32"	5/8"	13.57	12.98	12.40	11.80	
75030	.1250	1/8"	3.17	1/8"	1-1/2"	3/16"	5/8"	12.90	12.33	11.77	11.21
76040	.1410	3.58	3/16"	2"	3/16"	3/4"	19.10	18.27	17.44	16.61	
75040	.1562	5/32"	3.97	3/16"	2"	1/4"	3/4"	19.10	18.27	17.44	16.61
76050	.1720	4.37	3/16"	2"	7/32"	3/4"	19.10	18.27	17.44	16.61	
75050	.1875	3/16"	4.76	3/16"	2"	1/4"	3/4"	17.20	16.45	15.70	14.96
76060	.2030	5.16	1/4"	2"	1/4"	3/4"	19.71	18.86	17.99	17.14	
75060	.2188	7/32"	5.56	1/4"	2"	1/4"	3/4"	19.71	18.86	17.99	17.14
76070	.2350	5.97	1/4"	2"	5/16"	3/4"	19.71	18.86	17.99	17.14	
75070	.2500	1/4"	6.35	1/4"	2"	5/16"	3/4"	17.89	17.11	16.33	15.56
76080	* .3000	7.62	1/4"	2-1/2"	3/8"	-	28.88	27.62	26.37	25.12	
75080	.3125	* 5/16"	7.94	1/4"	2-1/2"	3/8"	-	28.88	27.62	26.37	25.12
76090	* .3600	9.14	1/4"	2-1/2"	1/2"	-	30.83	29.48	28.14	26.80	
75090	.3750	* 3/8"	9.52	1/4"	2-1/2"	1/2"	-	30.83	29.48	28.14	26.80
76100	* .4230	10.74	1/4"	2-1/2"	1/2"	-	33.55	32.09	30.63	29.17	
75100	.4375	* 7/16"	11.11	1/4"	2-1/2"	1/2"	-	33.55	32.09	30.63	29.17
76110	* .4850	12.32	1/4"	2-1/2"	1/2"	-	34.54	33.04	31.53	30.04	